



A.T. Monitors

A leader in leak detection and level monitoring equipment

ATI-6107 Leak/Level Monitor Panel

The ATI-6107 is a compact full service monitor designed to interface with any Normally Open or Normally Closed sensors, notify you of any leaks or spills immediately and, with optional module, provide liquid level display. The real-time response of this monitor allows you to avoid costly cleanups or interruptions in service, helping to protect your investment and the environment.

It's the first monitor of its kind to provide simple installation and DIP switch setup, intrinsically safe (IS) sensor inputs, and complete environmental protection to a level of NEMA-4X (IP66). Operating from 12 to 24 VDC, this monitor is ideal for use in remote locations using solar or wind power. These features, and an optional LED display module, offer amazing versatility and ease-of-use not found among comparable products (if any) on the market.

Liquid Detection Circuit

Each sensor is wired to a numbered channel. When liquid makes contact with or activates a sensor, the assigned channel goes into alarm. This causes the channel's LED to light up and sound an alarm.

Monitoring Capability: 6 channels/zones capable of monitoring any number of sensors in each zone.

Protection Circuit: Diode/resistor IS barrier on each channel w/ replaceable fuse.

Fuse Type and Rating: 6 Nano² SMF fuses, 1/8A (Littelfuse #0451.125).

Detectable Liquids: Refer to sensor data sheets for types of liquids.

Indicators, Alarms and Features

Power Switch: On-board SPST slide switch.

Power Indicator: Blue LED.

DIP Switches: Provide easy configuration of sensor type, buzzer activation, buzzer volume (loudness) and latching relays.

Test Switch: Miniature TACT switch activates the system test function.

Liquid Alarm / Latched Relay Indicators: 6 bi-color LEDs indicate alarm and relay conditions with different colors:

- Red when in alarm.
- Green when relay is latched but alarm not present.

Audio Alarm Buzzer: 90dB (H) or 75dB (L) @ 60cm (2 ft), 3kHz, NEMA-4X.

Alarm Acknowledge Switch: External sealed toggle switch on right side (up).


Reset Switch: External sealed toggle switch on right side (down).

Relay Outputs

The ATI-6107 has 6 relays which can provide notification of critical conditions about liquid leaks to remote locations or operate pumps, dispensers or any other external device.

Relays: Six (6) SPDT relays, one per channel.

Contacts: Rated up to 8A resistive, 3.5A inductive @ 250VAC/30VDC.

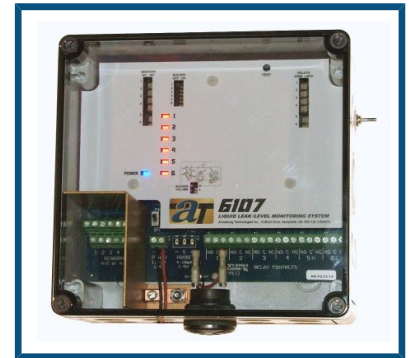

IMPORTANT: All Armstrong Technologies Inc products should be used in compliance with applicable federal, provincial, state and local laws and regulations. Product selection should be based on physical specifications and limitations and compatibility with the environment and materials to be handled. **Armstrong Technologies MAKES NO WARRANTY OF FITNESS FOR A PARTICULAR USE.** All information and specifications in this literature are based on the latest product data available at the time of publication. Armstrong Technologies reserves the right to make changes at any time in prices, materials, specifications and to discontinue products without notice or obligation.



This device is FCC exempt from EMC testing according to Section 15.103 of the rules.

A.T. MONITORS
A division of Armstrong Technologies Inc.

14 Birch Drive
Kemptville, Ontario
K0G 1J0, CANADA

Phone: 613-258-5225
Fax: 613-258-2698
E-mail: info@atmonitors.com
Internet: www.atmonitors.com

Acknowledge/Reset Toggle Switch

Moving the switch UP (acknowledge) silences the alarm buzzer but leaves the LED indicator on to remind the attendant of a potential leak or alarm level.

Moving the switch DOWN will unlatch activated relays (when configured for latching) and return the monitor to normal operating mode after any alarm conditions have been corrected. Reset will not work on channels where there is an alarm condition present.

Optional LED Level Display Module

An optional LED display module (factory installed) allows use of the ATI-5029 probe for liquid level measurement. The module is available with or without HI and LO alarm levels for the probe.

NOTE: With HI and LO alarms, only IS channels 1 to 4 are available for other sensors. Channels 5 and 6 are now used for the probe's HI and LO alarm outputs.

ATI-6107D version: Level display only.

ATI-6107DA version: Level display with HI and LO alarms.

Mounting and Accessibility

The ATI-6107 can be mounted on any flat surface, under counters, in kiosks or other small area for ease of access and visibility.

Power Requirements

Main Power (standard): 12 to 24 VDC @ 500mA.

Main Power (unit w/ display module): 12 to 24 VDC @ 1A.

Dimensions

H 7.1"/18cm x W 7.2"/18.3cm x D 3.55"/9cm.

Enclosure Material: Polycarbonate.

Protection Rating: NEMA-4X (IP66).

Operating Conditions

Temperature Range (standard): -20 to +60 °C (-4 to +140 °F).

Temperature Range (w/ display module): 0 to +50 °C (+32 to +122 °F).

Relative Humidity: Up to 50% @ 40°C (104°F) max.

Warranty

One (1) year, parts and labour, subject to standard Armstrong Technologies' terms and conditions.

COMPATIBLE SENSORS

5005 Series Water Sensors

5007B – Dual Liquid Sensing Cable

5008 – Vacuum Sensor

5010 – Liquid Level Float Sensors

5010S – Sump Brine Sensor

5010W – Interstitial Leak Sensor

5016 Series Petroleum Sensors

5025 – Water Detection Cable

REMOTE ALARM



For monitoring and acknowledging at non-hazardous remote location, A.T.Monitors offers the ATI-RAM1.

For more information, visit www.atmonitors.com or talk to a qualified agent.